

Journal of Mechanics of Materials and Structures

A TWO-DIMENSIONAL PROBLEM IN
MAGNETOTHERMOELASTICITY WITH LASER PULSE
UNDER DIFFERENT BOUNDARY CONDITIONS

Sunita Deswal, Sandeep Singh Sheoran and Kapil Kumar Kalkal

Volume 8, No. 8-10

October-December 2013



A TWO-DIMENSIONAL PROBLEM IN MAGNETOTHERMOELASTICITY WITH LASER PULSE UNDER DIFFERENT BOUNDARY CONDITIONS

SUNITA DESWAL, SANDEEP SINGH SHEORAN AND KAPIL KUMAR KALKAL

This paper is concerned with the study of vibrations induced by a laser beam in the context of generalized magnetothermoelasticity. The basic governing equations for isotropic and homogeneous elastic solids are formulated under Green–Naghdi theory in the x - z plane. The temporal profile of the laser beam is considered as non-Gaussian. The governing nondimensional equations are solved using normal mode analysis. The obtained solution is then applied to two specific problems in the half-space, where the boundary is subjected to either a mechanical or thermal load. Numerical computations are performed for a specific model to calculate the displacement, temperature, and stress fields and the results are displayed. The effects of time and magnetic field on the variation of different field quantities are analyzed in the figures.

1. Introduction

The dynamical interactions between the thermal and mechanical fields in solids are important to many practical applications, such as modern aeronautics, nuclear reactors and high speed particle accelerators, etc. The classical theory of thermoelasticity finds stresses caused by a temperature field using the parabolic heat conduction equation. The absence of any elasticity term in the heat conduction equation for uncoupled thermoelasticity appears to be unrealistic, since, due to mechanical loading of an elastic body, the strain so produced causes variation in temperature field. Moreover, the parabolic nature of the heat conduction equation results in an infinite velocity of wave propagation, which also contradicts the actual physical phenomena.

Biot [1956] developed the coupled theory of thermoelasticity to overcome the paradox inherent in the uncoupled theory, that elastic changes have no effect on temperature. In this theory, the equations of elasticity and heat conduction are coupled. However, it shares the defect of the uncoupled theory in which it predicts an infinite speed of propagation for heat waves. Generalized thermoelastic theories have been developed with the objective of removing this defect of coupled theory. The development of these theories was accelerated by the advent of the experimental observation of the second sound effect in materials at very low temperatures by Ackerman et al. [1966] and Ackerman and Overton [1969]. In heat transfer problems involving very short time intervals and/or very high heat flux, the second sound effect in the coupled theory yields results that are realistic and very much different from those obtained from the classical theory of thermoelasticity.

Sandeep Singh Sheoran is thankful to the University Grants Commission, New Delhi, for financial support in the form of Junior Research Fellowship vide letter no. F. 17-11/2008 (SA-1).

Keywords: G-N theory, magnetic field, laser pulse, normal mode analysis.

It is well known that there are three major generalizations of the theory of thermoelasticity. The first is that made by Lord and Shulman [1967], known as L-S theory, which involves one relaxation time for a thermoelastic process. The second is due to Green and Lindsay [1972] and is known as G-L theory. It takes into account two parameters as relaxation times. L-S theory only modifies Fourier's heat conduction equation, while G-L theory modifies both the energy equation and the equation of motion. Dhaliwal and Sherief [1980] extended L-S theory by including the anisotropic case. Later on, by providing sufficient basic modifications to the constitutive equations to follow thermodynamical principles, Green and Naghdi [1991; 1992; 1993] produced an alternative theory which was divided into three different parts, referred to as G-N theory of types I, II, and III. The constitutive assumptions for the heat flux vector are different in each theory. The nature of these three types of constitutive equations is such that when the respective theories are linearized, type I is same as classical heat conduction theory (based on Fourier's heat conduction law), type II predicts the finite speed of heat propagation involving no energy dissipation, and type III indicates the propagation of thermal signals with finite speed. Hetnarski and Ignaczak [1999] presented a survey of various representative theories in the range of generalized thermoelasticity. Ezzat et al. [2004] discussed a problem in generalized thermoelasticity theory for isotropic media with temperature-dependent moduli of elasticity under L-S, G-L, and coupled theories. Youssef [2006] studied two-dimensional generalized thermoelasticity problem with a spherical cavity subjected to thermal shock and ramp-type heating.

During pulsed laser heating, a thermoelastic wave is generated due to thermal expansion in the near-surface region and propagates into the target. Because of the extremely short heating time, the laser-induced thermoelastic wave has an extremely high strain rate, which in turn causes strong coupling between the strain rate and the temperature field. This coupling damps the stress wave during its propagation and induces a localized temperature variation [Wang and Xu 2001; 2002]. Chen et al. [2004] developed a problem in which three different approaches, ultrafast thermoelasticity, Lord-Shulman theory, and classical thermoelasticity, are used to investigate thermoelastic stress waves in a gold medium. Sun et al. [2008] studied the coupled thermoelastic vibrations of a microscale beam resonator induced by laser pulse heating. The vibrations of deflection and thermal moments were calculated using an analytical numerical technique based on the Laplace transformation. The effect of laser pulse energy depth, the size effect, and the effects of different boundary conditions were analyzed.

Laser-induced vibration of microbeam resonators has attracted considerable attention recently due to many important technological applications in microelectromechanical systems (MEMS) and nanoelectromechanical systems (NEMS). The field equations for coupled thermoelastic vibration of Rayleigh and Timoshenko beams have been derived by Jones [1966]. Many authors have studied the vibration and heat transfer process of beams [Kidawa-Kukla 1997; 2003; Fang et al. 2007].

So-called ultrashort lasers are those with a pulse duration ranging from nanoseconds to femtoseconds, in general. In the case of ultrashort-pulsed laser heating, high-intensity energy flux and ultrashort duration laser beams have introduced situations in which very large thermal gradients or an ultrahigh heating speed may exist on the boundaries. In such cases, as pointed out by many investigators, the classical Fourier model, which leads to an infinite propagation speed of thermal energy, is no longer valid [Joseph and Preziosi 1989; Özişik and Tzou 1994; Tzou 1997; Tang and Araki 1999]. The non-Fourier effect of heat conduction takes into account the effect of mean free time (thermal relaxation time) in the energy carrier's

collision process, which can eliminate this contradiction. He et al. [2002] solved a boundary value problem for a one-dimensional semi-infinite piezoelectric rod with the left boundary subjected to a sudden heat flux using the theory of generalized thermoelasticity with one relaxation time. Youssef and Al-Felali [2012] investigated the induced temperature and stress fields when subjected to non-Gaussian laser heating in context with classical coupled thermoelasticity, Lord–Shulman theory and Green–Lindsay theory.

The theory of magnetothermoelasticity has received the attention of many researchers due to its applications in widely diverse fields such as geophysics, for understanding the effect of earth's magnetic field on seismic waves, damping of acoustic waves, emission of electromagnetic radiations from nuclear devices, optics, etc. The theory of magnetothermoelasticity was introduced by Knopoff [1955] and Chadwick [1957] and developed by Kaliski and Petykiewicz [1959]. The theoretical outline of the development of magnetothermoelasticity was discussed by Paria [1962]. Paria studied the propagation of plane magnetothermoelastic waves in an isotropic unbounded medium under the influence of a magnetic field acting transversely to the direction of propagation. Nayfeh and Nemat-Nasser [1972] studied the propagation of plane waves in a solid under the influence of an electromagnetic field. Sherief and Ezzat [1996] discussed a thermal shock problem in magnetothermoelasticity with thermal relaxation. Sherief and Helmy [2002] illustrated a two-dimensional half-space problem subjected to a nonuniform thermal shock in the context of electromagnetothermoelasticity theory. Ezzat and Youssef [2005] constructed a generalized magnetothermoelasticity problem in a perfectly conducting medium. Baksi et al. [2005] examined a magnetothermoelastic problem with thermal relaxation and a heat source in a three-dimensional, infinite rotating elastic medium. Deswal and Kalkal [2011] employed normal mode analysis to study a problem in the purview of magnetothermoviscoelasticity with diffusion.

The objective of present investigation is to study the phenomenon of wave propagation in generalized magnetothermoelasticity with pulsed heating of a microbeam. Normal mode analysis is employed for the general solution of the problem. The resulting formulation is then applied to the problem of an elastic half-space whose boundary is subjected to two types of loads, mechanical and thermal. Finally, a numerical example has been considered and the results are displayed graphically to highlight the effects of magnetic field and time on physical quantities. To the authors' best knowledge, the technique of normal mode analysis has never been applied to Green–Naghdi theory of type III. It is also pertinent that hardly any effort has been made to discuss the laser pulse problem in the above-mentioned theory. In addition, we have also studied magnetic effects on the field variables. The present model is not only of theoretical interest, but may have practical applications in various fields such as geophysics, plasma physics, and other related topics. The self-focusing of a circularly polarized laser pulse in the hot plasma is very much influenced by the application of an external magnetic field. The external magnetic field enhances self-focusing for right-hand polarization while for left-hand polarization it acts to reduce self-focusing [Javan and Nasirzadeh 2012].

2. Governing equations

The governing equations in the context of Green–Naghdi theory of type III with a laser pulse heat source and a magnetic field for a isotropic and homogeneous elastic medium are (see [Kumar and Mukhopadhyay 2009])

- the equation of motion

$$\rho \ddot{u}_i = \sigma_{ji,j} + F_i, \quad (1)$$

where u_i are the components of displacement vector \vec{u} , ρ is the density of the medium, σ_{ij} are the components of the stress tensor, and F_i are the components of the Lorentz body force vector;

- the heat conduction equation

$$k^* \theta_{,ii} + k \dot{\theta}_{,ii} = \rho C_E \ddot{\theta} + \beta_1 T_0 \ddot{u}_{i,i} - \frac{\partial Q}{\partial t}, \quad (2)$$

where $\theta = T - T_0$ with T the absolute temperature and T_0 is a reference temperature assumed to obey the inequality $|\theta/T_0| \ll 1$, C_E is the specific heat, k^* is material constant, k is the thermal conductivity, and $\beta_1 = (3\lambda + 2\mu)\alpha_t$ with α_t is the coefficient of linear thermal expansion;

- the constitutive relations

$$\sigma_{ij} = 2\mu e_{ij} + \lambda e \delta_{ij} - \beta_1 \theta \delta_{ij}, \quad (3)$$

$$e_{ij} = \frac{1}{2}(u_{i,j} + u_{j,i}), \quad (4)$$

where e_{ij} are the components of strain tensor, δ_{ij} is the Kronecker delta function, e is the cubical dilation, and λ and μ are the Lamé constants.

We take linearized Maxwell's equations governing the electromagnetic field for a perfectly conducting medium as

$$\text{curl } \vec{h} = \vec{J} + \varepsilon_0 \frac{\partial \vec{E}}{\partial t}, \quad (5)$$

$$\text{curl } \vec{E} = -\mu_0 \frac{\partial \vec{h}}{\partial t}, \quad (6)$$

$$\vec{E} = -\mu_0 \left(\frac{\partial \vec{h}}{\partial t} \times \vec{H} \right), \quad (7)$$

$$\text{div } \vec{h} = 0, \quad (8)$$

where μ_0 is the magnetic permeability, ε_0 is the electric permittivity, \vec{H} is the applied magnetic field, \vec{h} is the induced magnetic field, \vec{E} is the induced electric field, \vec{J} is the current density vector, and Q is the laser pulse heat source.

3. Problem formulation

A rectangular cartesian coordinate system is chosen in such a way that the x -axis lies along the free boundary of a perfectly conducting homogeneous isotropic generalized thermoelastic half-space with a laser pulse heat source, subjected to a constant magnetic field $\vec{H}(0, H_0, 0)$ which produces an induced magnetic field $\vec{h}(0, h_2, 0)$ and induced electric field $\vec{E}(E_1, 0, E_3)$. Let the z -axis point vertically downward into the half-space so that it occupies the region $z \geq 0$. The surface ($z = 0$) of the half-space is subjected to mechanical and thermal loads, and all the considered quantities will be functions of the time variable t and of coordinates x and z . Also, the boundary plane ($z = 0$) of the half-space is heated

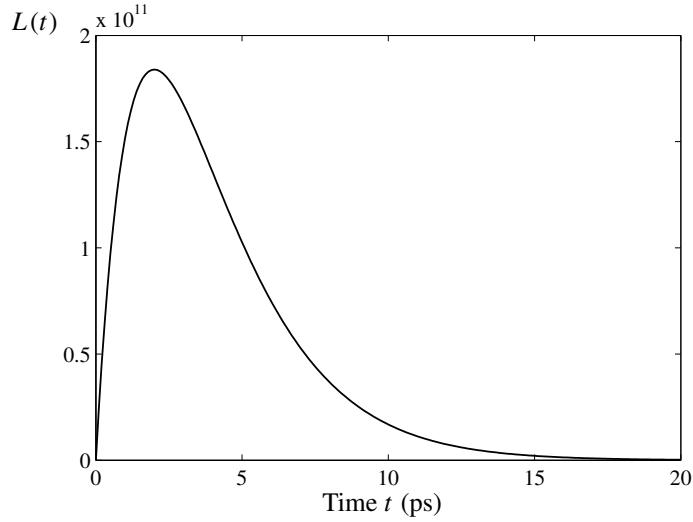


Figure 1. Temporal profile of $L(t)$ ($t_p = 2$ ps).

uniformly by a laser pulse with non-Gaussian temporal profile [Sun et al. 2008]

$$L(t) = \frac{L_0 t}{t_p^2} \exp\left(-\frac{t}{t_p}\right), \quad (9)$$

where t_p is the time duration of a laser pulse and L_0 the laser intensity, which is defined as the total energy carried by a laser pulse per unit cross section of the laser beam. In the present study we take $t_p = 2$ ps as the time duration. According to [Tang and Araki 1999], the thermal conduction in the beam can be modeled as a one-dimensional problem with an energy source $Q(z, t)$ as

$$Q(z, t) = \frac{R_a}{\delta} \exp\left(\frac{z-h/2}{\delta}\right) L(t), \quad (10)$$

where δ is the absorption depth of the heating energy and R_a the absorptivity of the irradiated surface. For a two-dimensional problem in the x - z plane, the displacement components take the form

$$u = u(x, z, t), \quad v = 0, \quad w = w(x, z, t). \quad (11)$$

The strain components become

$$e_{xx} = \frac{\partial u}{\partial x}, \quad e_{zz} = \frac{\partial w}{\partial z}, \quad e_{xz} = \frac{1}{2} \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), \quad e_{xy} = e_{yz} = e_{yy} = 0. \quad (12)$$

The cubical dilatation e is thus given by

$$e = e_{xx} + e_{yy} + e_{zz} = \left(\frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} \right). \quad (13)$$

The components of the initial magnetic field vector \vec{H} are

$$H_x = 0, \quad H_y = H_0, \quad H_z = 0. \quad (14)$$

The electric intensity vector \vec{E} is parallel to the current density vector \vec{J} , thus

$$E_x = E_1, \quad E_y = 0, \quad E_z = E_3, \quad (15)$$

$$J_x = J_1, \quad J_y = 0, \quad J_z = J_3. \quad (16)$$

From (5)–(8), we can obtain

$$E_1 = \mu_0 H_0 \frac{\partial w}{\partial t}, \quad E_3 = -\mu_0 H_0 \frac{\partial u}{\partial t}, \quad (17)$$

$$h_1 = 0, \quad h_2 = -H_0 e, \quad h_3 = 0, \quad (18)$$

$$J_1 = -\varepsilon_0 \mu_0 H_0 \frac{\partial^2 w}{\partial t^2}, \quad J_3 = \varepsilon_0 \mu_0 H_0 \frac{\partial^2 u}{\partial t^2}. \quad (19)$$

The Lorentz's force \vec{F} is given by the relation

$$\vec{F} = \mu_0 (\vec{J} \times \vec{H}). \quad (20)$$

Inserting (14) and (19) in (20), we can obtain the components of the Lorentz's force \vec{F} as

$$F_x = -\varepsilon_0 \mu_0^2 H_0^2 \frac{\partial^2 u}{\partial t^2}, \quad F_y = 0, \quad F_z = -\varepsilon_0 \mu_0^2 H_0^2 \frac{\partial^2 w}{\partial t^2}. \quad (21)$$

Now, we will use the following nondimensional variables:

$$\begin{aligned} (x', z', u', w', \delta', h') &= c_0 \eta_0 (x, z, u, w, \delta, h), & (t', t'_p) &= c_0^2 \eta_0 (t, t_p), \\ (\sigma'_{ij}, p'_1) &= \frac{1}{\lambda + 2\mu} (\sigma_{ij}, p_1), & (\theta', p'_2) &= \frac{\beta_1}{(\lambda + 2\mu)} (\theta, p_2), \end{aligned} \quad (22)$$

where

$$c_0^2 = \frac{\lambda + 2\mu}{\rho}, \quad \eta_0 = \frac{\rho C_E}{k^*} \bar{\omega}, \quad \bar{\omega} = \frac{\rho C_E c_0^3}{k^* h^*},$$

and h^* is some standard length.

With the help of these nondimensional quantities, (1)–(3) take the following form (dropping the prime signs for convenience):

$$\alpha \frac{\partial^2 u}{\partial t^2} = \beta^2 \nabla^2 u + (1 - \beta^2) \frac{\partial e}{\partial x} - \frac{\partial \theta}{\partial x}, \quad (23)$$

$$\alpha \frac{\partial^2 w}{\partial t^2} = \beta^2 \nabla^2 w + (1 - \beta^2) \frac{\partial e}{\partial z} - \frac{\partial \theta}{\partial z}, \quad (24)$$

$$k^* \nabla^2 \theta + k (c_0^2 \eta_0) \nabla^2 \dot{\theta} = \rho C_E c_0^2 \frac{\partial^2 \theta}{\partial t^2} + \frac{\beta_1 T_0}{\rho} \frac{\partial^2 e}{\partial t^2} - \frac{\beta_1 c_0 \eta_0}{\rho} \frac{\partial Q}{\partial t}, \quad (25)$$

$$\sigma_{zx} = \beta^2 \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), \quad (26)$$

$$\sigma_{zz} = \frac{\partial w}{\partial z} + (1 - 2\beta^2) \frac{\partial u}{\partial x} - \theta, \quad (27)$$

where

$$\alpha = 1 + \frac{\varepsilon_0 \mu_0^2 H_0^2}{\rho}, \quad \beta^2 = \frac{\mu}{\lambda + 2\mu}.$$

Now, we introduce the displacement potentials $\phi(x, z, t)$ and $\psi(x, z, t)$, which are related to the displacement components as

$$u = \frac{\partial \phi}{\partial x} + \frac{\partial \psi}{\partial z}, \quad w = \frac{\partial \phi}{\partial z} - \frac{\partial \psi}{\partial x}. \quad (28)$$

By simplifying (23)–(25) using (28) along with (9) and (10), we obtain the following equations:

$$\frac{\partial^2 \phi}{\partial t^2} = \frac{1}{\alpha} (\nabla^2 \phi - \theta), \quad (29)$$

$$\frac{\partial^2 \psi}{\partial t^2} = \frac{1}{\alpha_0} \nabla^2 \psi, \quad (30)$$

$$k_1 \nabla^2 \theta + k_2 \nabla^2 \dot{\theta} = \frac{\partial^2 \theta}{\partial t^2} + \varepsilon_1 \nabla^2 \ddot{\phi} - \varepsilon_2 \frac{R_a L_0}{\delta t_p^2} \exp\left(\frac{z-h/2}{\delta} - \frac{t}{t_p}\right), \quad (31)$$

where

$$\alpha_0 = \frac{\alpha}{\beta^2}, \quad k_1 = \frac{k^*}{(\lambda + 2\mu)C_E}, \quad k_2 = \frac{k}{k^*} \bar{\omega}, \quad \varepsilon = \frac{\beta_1^2}{(\lambda + 2\mu)\rho}, \quad \varepsilon_1 = \frac{\varepsilon T_0}{C_E}, \quad \varepsilon_2 = \frac{\sqrt{\varepsilon}}{k^*} \bar{\omega}.$$

4. Normal mode analysis

The solution of the considered physical variables can be decomposed in terms of normal modes as

$$(u, w, \phi, \psi, \theta, \sigma_{ij})(x, z, t) = (u^*, w^*, \phi^*, \psi^*, \theta^*, \sigma_{ij}^*)(z) e^{(\omega t + mx)}, \quad (32)$$

where ω is the complex time constant and m is the wave number in x -direction.

Using (32) in (29)–(31), we get

$$(D^2 - \varepsilon_3)\psi^* = 0, \quad (33)$$

$$(D^2 - \varepsilon_4)\phi^* = \theta^*, \quad (34)$$

$$(\varepsilon_5 D^2 - \varepsilon_6)\theta^* - \varepsilon_1 \omega^2 (D^2 - m^2)\phi^* + \varepsilon_2 \varepsilon_7 \exp\left(\frac{z-h/2}{\delta} - \frac{t}{t_p} - \omega t - imx\right) = 0, \quad (35)$$

where

$$D \cong \frac{\partial}{\partial z}, \quad \varepsilon_3 = m^2 + \alpha_0 \omega^2, \quad \varepsilon_4 = m^2 + \alpha \omega^2, \quad \varepsilon_5 = k_1 + \omega k_2, \quad \varepsilon_6 = \varepsilon_5 m^2 + \omega^2, \quad \varepsilon_7 = \frac{R_a L_0}{t_p^2 \delta}.$$

Eliminating $\theta^*(z)$ between (34) and (35), we get the following fourth-order partial differential equation satisfied by $\phi^*(z)$:

$$(D^4 - AD^2 + B)\phi^*(z) = -CE \exp\left(\frac{z-h/2}{\delta} - \frac{t}{t_p} - \omega t - imx\right), \quad (36)$$

where

$$A = \frac{\varepsilon_4 \varepsilon_5 + \varepsilon_1 \omega^2 + \varepsilon_6}{\varepsilon_5}, \quad B = \frac{\varepsilon_4 \varepsilon_6 + \varepsilon_1 m^2 \omega^2}{\varepsilon_5}, \quad C = \frac{\varepsilon_2 \varepsilon_7}{\varepsilon_5}, \quad E = 1 - \frac{(1 + \omega t_p)t}{t_p}.$$

Using the solutions of (33), (34), and (36) (which are assumed to be bounded as $z \rightarrow \infty$), we can express $\phi(x, z, t)$, $\psi(x, z, t)$, and $\theta(x, z, t)$ in the following forms:

$$\phi(x, z, t) = \left(\sum_{i=1}^2 L_i e^{-\lambda_i z} \right) e^{(\omega t + i m x)} - \varepsilon_8 f_1(z, t), \quad (37)$$

$$\psi(x, z, t) = L_3 e^{-\lambda_3 z} e^{(\omega t + i m x)}, \quad (38)$$

$$\theta(x, z, t) = \left(\sum_{i=1}^2 L'_i e^{-\lambda_i z} \right) e^{(\omega t + i m x)} - \varepsilon_9 f_1(z, t), \quad (39)$$

where L_i , L'_i ($i = 1, 2$), and L_3 are parameters depending on m and ω and

$$f_1(z, t) = C E \exp\left(\frac{z-h/2}{\delta} - \frac{t}{t_p}\right), \quad L'_i = (\lambda_i^2 - \varepsilon_3) L_i \quad (i = 1, 2),$$

$$\varepsilon_8 = \left(\frac{\delta^4}{\delta^4 B - \delta^2 A + 1}\right), \quad \varepsilon_9 = \frac{1 - \varepsilon_4 \delta^2}{\delta^2}.$$

Here, λ_i ($i = 1, 2$) are the positive roots of the characteristic equation

$$\lambda^4 - A\lambda^2 + B = 0,$$

and λ_3 is the root of the characteristic equation

$$\lambda^2 - \varepsilon_3 = 0.$$

Similarly, applying normal mode analysis and using the solutions of (33), (34), and (36) in (26)–(28), we get

$$u = \left(i m \sum_{i=1}^2 L_i e^{-\lambda_i z} - \lambda_3 L_3 e^{-\lambda_3 z} \right) e^{(\omega t + i m x)} - i m \varepsilon_8 f_1(z, t), \quad (40)$$

$$w = - \left[\left(\sum_{i=1}^2 L_i \lambda_i e^{-\lambda_i z} + (i m) L_3 e^{-\lambda_3 z} \right) e^{(\omega t + i m x)} + \varepsilon_8 \frac{f_1(z, t)}{\delta} \right], \quad (41)$$

$$\sigma_{zx} = -\beta^2 \left[\left(2 i m \sum_{i=1}^2 L_i \lambda_i e^{-\lambda_i z} - (\lambda_3^2 + m^2) L_3 e^{-\lambda_3 z} \right) e^{(\omega t + i m x)} + f_2(z, t) \right], \quad (42)$$

$$\sigma_{zz} = \left(\sum_{i=1}^2 (\eta + \varepsilon_4) L_i e^{-\lambda_i z} - 2 i m \beta^2 \lambda_3 L_3 e^{-\lambda_3 z} \right) e^{(\omega t + i m x)} + f_3(z, t), \quad (43)$$

where $\eta = (1 - 2\beta^2)m^2$, $f_2(z, t) = \varepsilon_8(2im/\delta)f_1(z, t)$, and $f_3(z, t) = (\eta - 1/\delta^2 - \varepsilon_9)\varepsilon_8 f_1(z, t)$.

5. Applications

We consider a homogeneous, isotropic magnetothermoelastic solid with laser pulse heating occupying the half-space $z \geq 0$. The boundary $z = 0$ of the half-space is subjected to mechanical and thermal loads.

Case (i): *Mechanical load.* For an isothermal boundary plane $z = 0$, subjected to a normal mechanical load, the boundary conditions are given as

$$\sigma_{zz}(x, 0, t) + \bar{\sigma}_{zz}(x, 0, t) = -p_1(x, t), \tag{44}$$

$$\sigma_{zx}(x, 0, t) + \bar{\sigma}_{zx}(x, 0, t) = 0, \tag{45}$$

$$\theta(x, 0, t) = 0, \tag{46}$$

where $p_1(x, t)$ is a given function of x and t , σ_{zj} is the mechanical stress, and $\bar{\sigma}_{zj}$ ($j = x, y, z$) is the Maxwell stress, which is given as

$$\bar{\sigma}_{zj} = \mu_0[H_z h_j + H_j h_z - H_k h_k \delta_{zj}]. \tag{47}$$

Invoking the nondimensional form of (44)–(46) along with (26)–(28) and normal mode analysis as for (32), we obtain the system of equations

$$P_1 L_1 + P_2 L_2 + P_3 L_3 = P, \tag{48}$$

$$Q_1 L_1 + Q_2 L_2 + Q_3 L_3 = Q, \tag{49}$$

$$R_1 L_1 + R_2 L_2 = R, \tag{50}$$

whose coefficients are defined as follows, where $\eta_1 = \frac{\mu_0 H_0^2}{\lambda + 2\mu}$:

$$\begin{aligned} P_i &= \lambda_i^2 \eta_1 + m^2(2\beta^2 - \eta_1) + \alpha\omega^2, & Q_i &= -2im\lambda_i, & R_i &= \lambda_i^2 - \varepsilon_4, & i &= 1, 2, \\ P_3 &= 2im\lambda_3\beta^2, & Q_3 &= \lambda_3^2 + m^2, \\ P &= -p_1^* + \left(\frac{1}{\delta^2}(1 + \eta_1) - \eta - m^2\eta_1 - \varepsilon_9\right)\varepsilon_8 f_1(z, t)e^{-(\omega t + imx)}, \\ Q &= \frac{2im}{\delta}\varepsilon_8 f_1(z, t)e^{-(\omega t + imx)}, & R &= \varepsilon_8 \varepsilon_9 f_1(z, t)e^{-(\omega t + imx)}. \end{aligned} \tag{51}$$

The solution of the system of linear equations (48)–(50) can be expressed as

$$L_1 = \frac{\Delta_1}{\Delta}, \quad L_2 = \frac{\Delta_2}{\Delta}, \quad L_3 = \frac{\Delta_3}{\Delta}, \tag{52}$$

where

$$\Delta_1 = -P R_2 Q_3 + Q R_2 P_3 + R(P_2 Q_3 - Q_2 P_3), \tag{53}$$

$$\Delta_2 = -P_1 R Q_3 + Q_1 R P_3 + R_1(P Q_3 - Q P_3), \tag{54}$$

$$\Delta_3 = P_1(Q_2 R - Q R_2) - Q_1(P_2 R - R_2 P) + R_1(P_2 Q - Q_2 P), \tag{55}$$

$$\Delta = -P_1 R_2 Q_3 + Q_1 R_2 P_3 + R_1(P_2 Q_3 - Q_2 P_3). \tag{56}$$

Substituting the values of L_1 , L_2 and L_3 from (52) into (39)–(43), we get the expressions for the displacement components, temperature distribution, and stress components as

$$u = \frac{1}{\Delta} \left(im \sum_{i=1}^2 \Delta_i e^{-\lambda_i z} - \lambda_3 \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)} - (im)\varepsilon_8 f_1(z, t), \tag{57}$$

$$w = -\left[\frac{1}{\Delta} \left(\sum_{i=1}^2 \Delta_i \lambda_i e^{-\lambda_i z} + im \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)} + \varepsilon_8 \frac{f_1(z, t)}{\delta} \right], \quad (58)$$

$$\theta = \frac{1}{\Delta} \left(\sum_{i=1}^2 (\lambda_i^2 - \varepsilon_3) \Delta_i e^{-\lambda_i z} \right) e^{(\omega t + imx)} - \varepsilon_8 \varepsilon_9 f_1(z, t), \quad (59)$$

$$\sigma_{zx} = -\beta^2 \left[\frac{1}{\Delta} \left(2im \sum_{i=1}^2 \Delta_i \lambda_i e^{-\lambda_i z} - \eta_2 \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)} + f_2(z, t) \right], \quad (60)$$

$$\sigma_{zz} = \frac{1}{\Delta} \left(\sum_{i=1}^2 (\eta + \varepsilon_4) \Delta_i e^{-\lambda_i z} - 2im\beta^2 \lambda_3 \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)} + f_3(z, t), \quad (61)$$

where $\eta_2 = \lambda_3^2 + m^2$.

Case (ii): *Thermal load*. In this case the boundary conditions on the surface $z = 0$ are given by

$$\sigma_{zz}(x, 0, t) + \bar{\sigma}_{zz}(x, 0, t) = 0, \quad (62)$$

$$\sigma_{zx}(x, 0, t) + \bar{\sigma}_{zx}(x, 0, t) = 0, \quad (63)$$

$$\theta(x, 0, t) = p_2(x, t), \quad (64)$$

where $p_2(x, t)$ is a given function of x and t .

Adopting the same procedure as in Case (i), that is, using the required expressions in (62)–(64) (the dimensionless forms) and normal mode analysis, we can get a system of linear equations:

$$P_1 L_1 + P_2 L_2 + P_3 L_3 = P', \quad (65)$$

$$Q_1 L_1 + Q_2 L_2 + Q_3 L_3 = Q, \quad (66)$$

$$R_1 L_1 + R_2 L_2 = R', \quad (67)$$

where

$$P' = \left(\frac{1}{\delta^2} (1 + \eta_1) - \eta - m^2 \eta_1 - \varepsilon_9 \right) \varepsilon_8 f_1(z, t) e^{-(\omega t + imx)}, \quad (68)$$

$$R' = p_2^* + \varepsilon_8 \varepsilon_9 f_1(z, t) e^{-(\omega t + imx)}.$$

The corresponding expressions for the displacement components u and w , temperature distribution θ , and stress components σ_{zx} and σ_{zz} are given by (57)–(61) with (P, R) replaced by (P', R') in (53)–(55).

6. Limiting cases

6.1. Neglecting the laser pulse effect.

Case (i): *Mechanical load*. To obtain the expressions for u , w , θ , σ_{zx} , and σ_{zz} in the context of the generalized theory of magnetothermoelasticity due to a mechanical load applied on the isothermal boundary $z = 0$, we shall neglect the parameter corresponding to the laser pulse heat. For this, we put $L_0 = 0$, which implies that $\varepsilon_7 = 0$ and $f_1(z, t) = 0$. Now, substituting $f_1(z, t) = 0$ in (51), we get the following modifications in the expressions of P , Q , and R :

$$P = -p_1^*, \quad Q = 0, \quad R = 0. \quad (69)$$

Using (69) in (53)–(55), we get

$$\Delta_1 = -p_1^* R_2 Q_3, \quad \Delta_2 = -p_1^* R_1 Q_3, \quad \Delta_3 = -p_1^* (R_2 Q_1 - R_1 Q_2). \quad (70)$$

Hence, (57)–(61) take the form

$$u = \frac{1}{\Delta} \left(um \sum_{i=1}^2 \Delta_i e^{-\lambda_i z} - \lambda_3 \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)}, \quad (71)$$

$$w = - \left[\frac{1}{\Delta} \left(\sum_{i=1}^2 \Delta_i \lambda_i e^{-\lambda_i z} + um \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)} \right], \quad (72)$$

$$\theta = \frac{1}{\Delta} \left(\sum_{i=1}^2 (\lambda_i^2 - \varepsilon_3) \Delta_i e^{-\lambda_i z} \right) e^{(\omega t + imx)}, \quad (73)$$

$$\sigma_{zx} = -\beta^2 \left[\frac{1}{\Delta} \left(2um \sum_{i=1}^2 \Delta_i \lambda_i e^{-\lambda_i z} - \eta_2 \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)} \right], \quad (74)$$

$$\sigma_{zz} = \frac{1}{\Delta} \left(\sum_{i=1}^2 (\eta + \varepsilon_4) \Delta_i e^{-\lambda_i z} - 2um\beta^2 \lambda_3 \Delta_3 e^{-\lambda_3 z} \right) e^{(\omega t + imx)}. \quad (75)$$

Case (ii): *Thermal load*. Similarly, for a thermal load, the corresponding expressions for the field variables under generalized magnetoelastoclasticity are given by (71)–(75) with Δ_i replaced by Δ_i^* , where

$$P' = 0, \quad Q = 0, \quad R' = p_2^*, \quad (76)$$

and

$$\Delta_1^* = p_2^* (P_2 Q_3 - Q_2 P_3), \quad (77)$$

$$\Delta_2^* = -p_2^* (P_1 Q_3 - Q_1 P_3), \quad (78)$$

$$\Delta_3^* = p_2^* (P_1 Q_2 - P_2 Q_1). \quad (79)$$

6.2. Neglecting the magnetic effect. Case (i): *Mechanical load*. For a mechanical load applied on the isothermal boundary $z = 0$, we take $H_0 = 0$ and thus obtain $\alpha = 1$, which provides the following modifications in (51):

$$P_i = 2\beta^2 m^2 + \omega^2, \quad P = -p_1^* + \left(\frac{1}{\delta^2} - \eta - \varepsilon_9 \right) \varepsilon_8 f_1(z, t) e^{-(\omega t + imx)}, \quad i = 1, 2.$$

By considering these modifications in (53)–(56), we get the corresponding expressions for field variables from (57)–(61).

Case (ii): *Thermal load*. Similarly, in case of a thermal load, we assume that magnetic properties are absent from the medium. Then, by taking $H_0 = 0$ and $\alpha = 1$, we get the following changes in (68):

$$P_i = 2\beta^2 m^2 + \omega^2, \quad P' = \left(\frac{1}{\delta^2} - \eta - \varepsilon_9 \right) \varepsilon_8 f_1(z, t) e^{-(\omega t + imx)}, \quad i = 1, 2.$$

Following the same procedure as described earlier in Section 5(ii) and considering the above modifications, the corresponding expressions for u , w , θ , σ_{zx} , and σ_{zz} are given by (57)–(61).

7. Numerical results and discussions

In this section, we carry out computational work in order to illustrate the results derived in Section 5 and examine the behavior of the displacement components u and w , temperature distribution θ , and stress components σ_{zx} and σ_{zz} .

For this purpose, the material is chosen as copper and the values of the relevant parameters are taken as follows:

$$\begin{aligned} k &= 386 \text{ Wm}^{-1}\text{K}^{-1}, & T_0 &= 293 \text{ K}, & \rho &= 8954 \text{ kgm}^{-3}, & \alpha_t &= 1.78 \times 10^{-5} \text{ K}^{-1}, \\ C_E &= 383.1 \text{ Jkg}^{-1}\text{K}^{-1}, & R_a &= 0.5, & \mu_0 &= 4\pi \times 10^{-7} \text{ Hm}^{-1}, & \varepsilon_0 &= (10^{-9}/36\pi) \text{ Fm}^{-1}, \\ H_0 &= (10^7/4\pi) \text{ Am}^{-1}, & h &= 0.01, & \delta &= 0.01, & L_0 &= 1 \times 10^{11} \text{ Jm}^{-1}, \\ \lambda &= 7.76 \times 10^{10} \text{ kgm}^{-1}\text{s}^{-2}, & m &= 1.2, & \omega &= 1. & \mu &= 3.86 \times 10^{10} \text{ kgm}^{-1}\text{s}^{-2}. \end{aligned}$$

The computation is carried out for

$$t = 0.1, 0.3, 0.5; \quad p_1^* = 10; \quad p_2^* = 10; \quad x = 1; \quad 0 \leq z \leq 4.5; \quad h^* = 10.$$

A comparison of the dimensionless form of the field variables for the cases of magnetothermoelasticity with a laser pulse (MTLP) and generalized thermoelasticity theory with a laser pulse (TLP) for three different values of time t , subjected to mechanical and thermal loads, is presented in Figures 2–9. The values of all the physical quantities for all the cases are displayed in the range $0 \leq z \leq 4.5$.

Case (i): *Mechanical load*. Figure 2 shows the variation of displacement component u with the distance z for MTLP and TLP for different values of t . We observe that all the curves show similar behavior, that is,

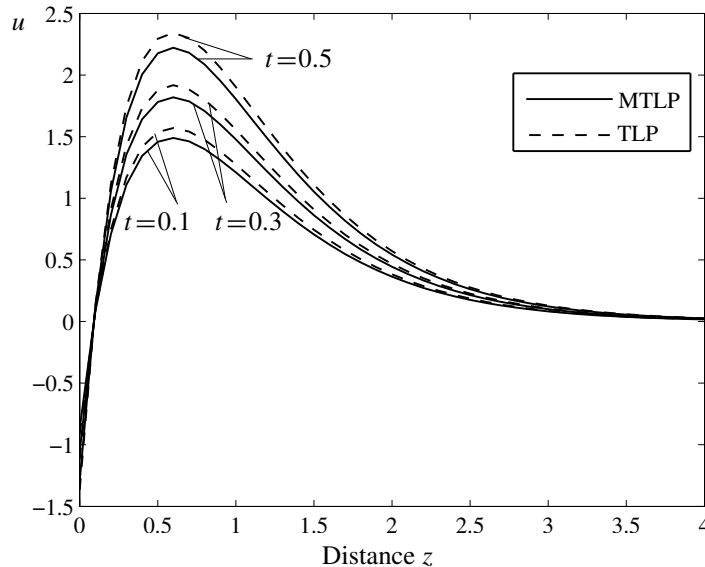


Figure 2. Variation of displacement u for a mechanical load.

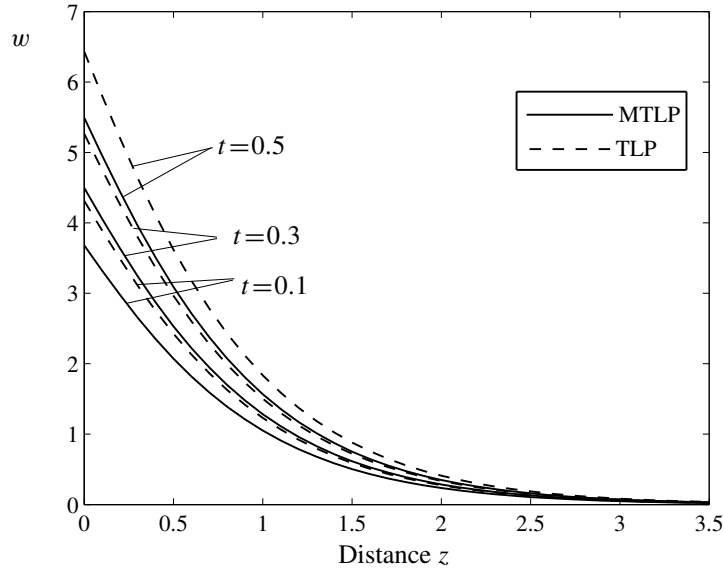


Figure 3. Variation of displacement w for a mechanical load.

all the curves start with negative values on the boundary of half-space, then rapidly increase to a maximal positive value and thereafter continuously decrease to zero value. Also, the effect of the magnetic field is significant for $0.5 \leq z \leq 2$ and the influence of time t is prominent in the range $0.3 \leq z \leq 3$.

Figure 3 shows the variation of displacement component w with distance z for MTLP and TLP for different values of t . We note that w starts with a positive value and then decreases continuously to zero value for all the cases in the range $0 \leq z \leq 3.5$. We see that the increment in time as well as the absence of magnetic field increase the magnitude of displacement component w . For MTLP and TLP at $t = 0.1, 0.3,$ and 0.5 , the effect is pronounced in the range $0 \leq z \leq 2$.

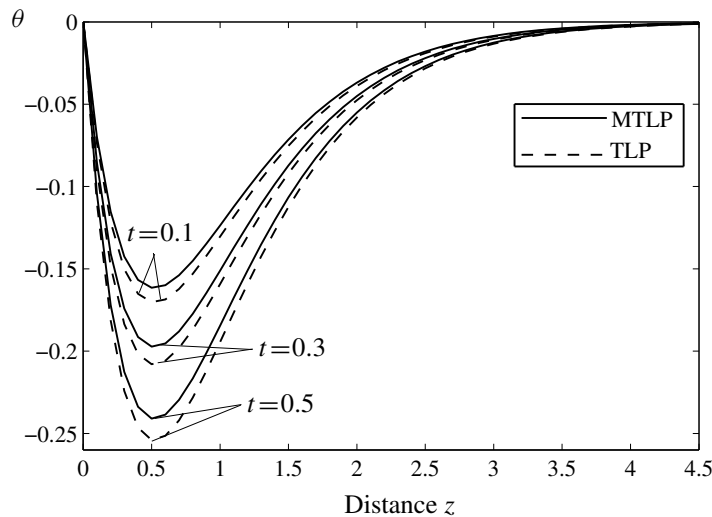


Figure 4. Variation of temperature distribution θ for a mechanical load.

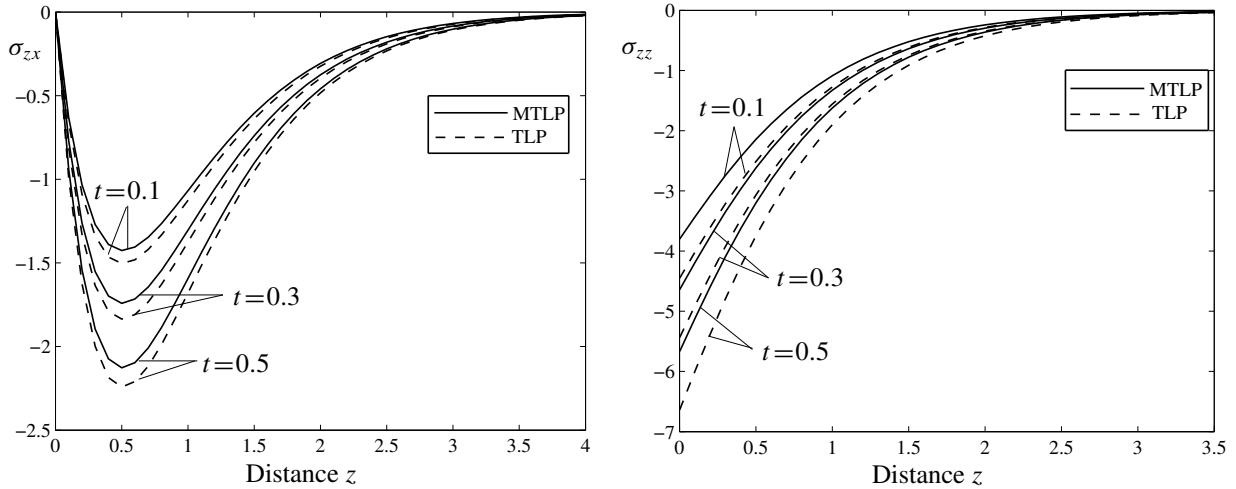


Figure 5. Variation of tangential stress σ_{zx} (left) and normal stress σ_{zz} (right) for a mechanical load.

Figure 4 shows the variation of θ with distance z for MTLP and TLP for different values of time t . It can be seen that the behavior of θ for all the three cases is similar: its magnitude increases in the range $0 \leq z \leq 0.5$ and then decreases in the range $0.5 \leq z \leq 4.5$. It is also seen that time strongly affects the temperature distribution θ ; the difference is pronounced for both MTLP and TLP.

Figure 5 displays the variation of tangential stress σ_{zx} and normal stress σ_{zz} with distance z for MTLP and TLP for different values of t . In both cases the magnitude is greater for TLP than for MTLP, and it increases with t . It is also seen that all the curves show similar trends and the difference for time t is more pronounced than for a magnetic field.

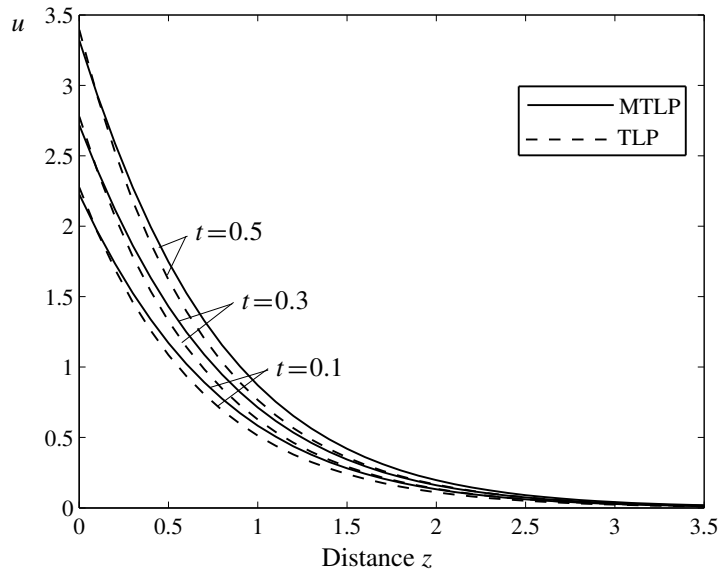


Figure 6. Variation of displacement u for a thermal load.

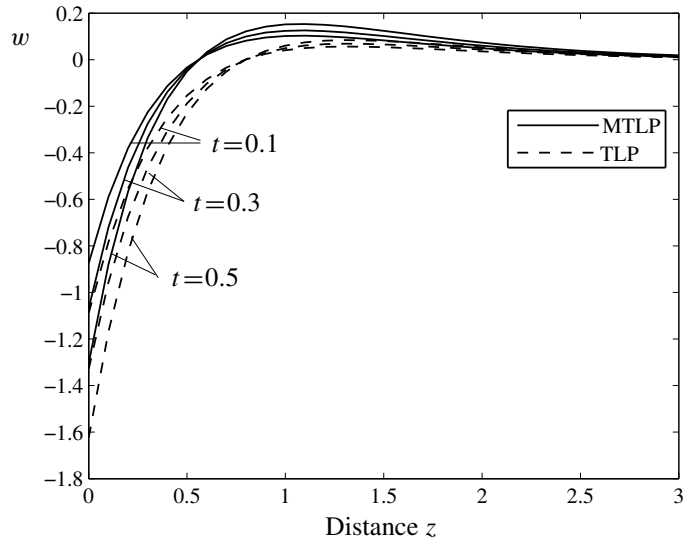


Figure 7. Variation of displacement w for a thermal load.

Case (ii): *Thermal load.* Figure 6 displays the variation of u with distance z for MTLP and TLP for different values of t . It is noticed that for all the cases the displacement component u behaves similarly. The values of u for TLP are found to be greater in the range $0 \leq z \leq 0.25$ and lesser in the range $0.25 \leq z \leq 3.5$, as compared to MTLP. Moreover, the value of u increases with time.

Figure 7 depicts the variation of w with distance z for MTLP and TLP for different values of t . The magnetic field acts to decrease the magnitude of displacement component w while an increment in time significantly enlarges the magnitude of w . Also, w shows a similar pattern for all the curves. The difference is clearly noticeable for MTLP and TLP in the range $0 \leq z \leq 2$.

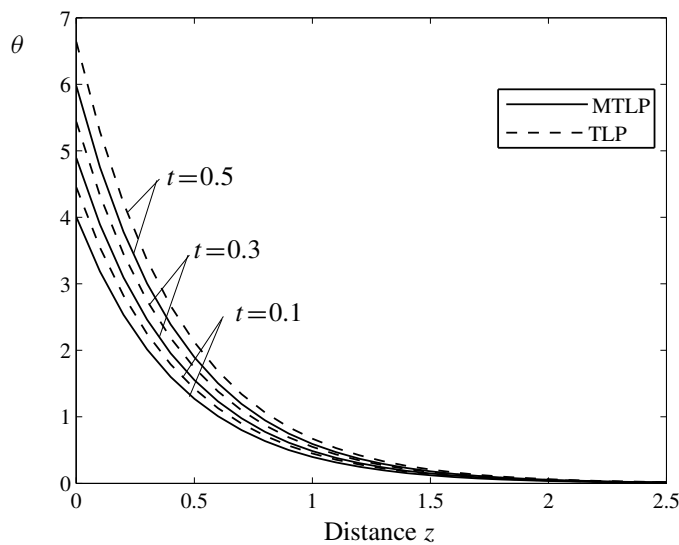


Figure 8. Variation of temperature distribution θ for a thermal load.

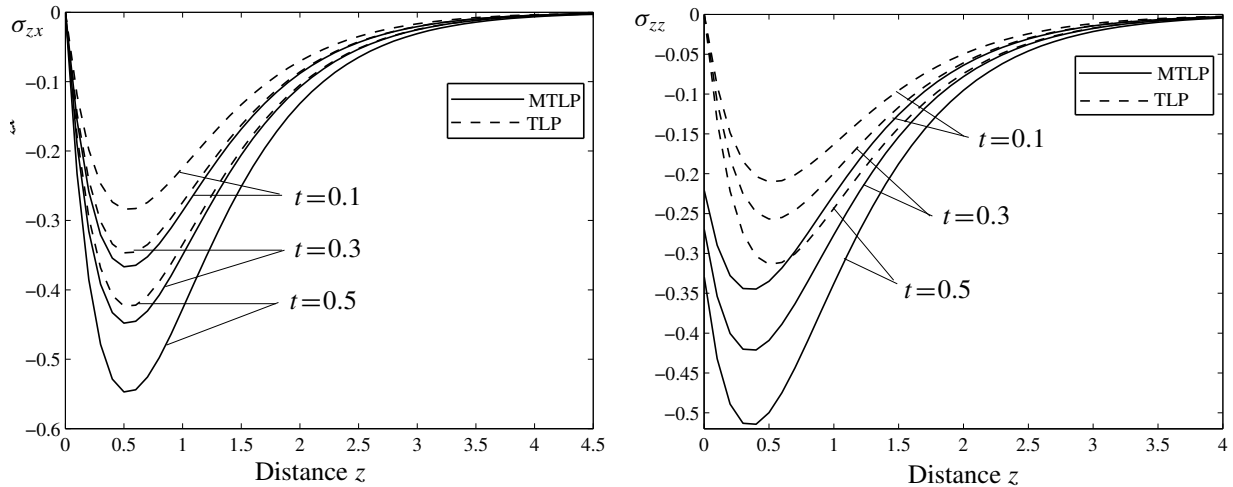


Figure 9. Variation of tangential stress σ_{zx} (left) and normal stress σ_{zz} (right) for a thermal load.

Figure 8 shows the variation of θ with distance z for MTLP and TLP for different values of t . We see that the trend of θ for all the cases is found to be similar. We notice that θ increases with time t while the presence of a magnetic field lowers the value of temperature. The effect of a magnetic field and time on temperature is prominent.

Figure 9 demonstrates the variation of σ_{zx} and σ_{zz} with distance z for MTLP and TLP for different values of t . We observe that σ_{zx} begins at zero value at $z = 0$ for all cases, then increases sharply to attain its highest value (in magnitude) at $z = 0.5$, and thereafter diminishes smoothly to zero. Hence, all the curves show similar trends. The magnitude of σ_{zx} for TLP is smaller than for MTLP; in both cases it increases with time. As for σ_{zz} , the curves for MTLP start at a negative value, while for TLP the curves begin with zero value. Normal stress shows significant sensitivity towards both factors. The magnitude of σ_{zz} decreases if we neglect the magnetic effect, and it increases with t .

8. Conclusions

The problem of investigating displacement components, temperature, and stress components in an infinite, homogeneous isotropic elastic half-space is studied in the purview of magnetoelastostatics with a laser pulse. A normal mode analysis technique is employed to express the results mathematically. Theoretically obtained field variables are also exemplified through a specific model to present the results in graphical form.

The analysis of results permits some concluding remarks:

- (1) It is clear from the figures that all the field variables have nonzero values only in the bounded region of space. Outside this region, the values vanish identically. This means that this outside region has not felt any thermal disturbance yet. Hence, all the results are in agreement with the generalized theory of thermoelastostatics.
- (2) The effect of the magnetic field is much pronounced in all the field variables except for the displacement component u and temperature field θ (however, it is still significant) in the case of a

thermal load. In case of a mechanical load being applied, the presence of a magnetic field decreases the magnitude of all the field variables, whereas it has both increasing and decreasing effects for thermal load.

- (3) We see from the figures that the time t plays a significant role in all the field quantities. Changes in the value of time t cause significant changes in all the studied fields, and the magnitudes of all the field variables increase with an increase in time t .
- (4) We can easily conclude from the figures that the curves for all the field variables show similar behaviors, for all the cases considered and for both type of loads applied.
- (5) If the laser pulse effect is neglected, then the results are in agreement with [Das and Kanoria 2012] with appropriate modification in the boundary conditions.
- (6) The temperature distribution θ shows a zero value for a mechanical load and a maximal value for a thermal load at the boundary of the surface, which is physically plausible and consistent with the theoretical boundary conditions of the problem.

The new model is employed in a homogeneous, isotropic thermoelastic medium as a new improvement in the field of thermoelasticity. The subject becomes more interesting because the use of a laser pulse with an extensive short duration or a very high heat flux has found numerous applications. The method used in this article is applicable to a wide range of problems in thermodynamics. By the obtained results, it is expected that the present model of equations will serve as more realistic and will provide motivation to investigate generalized magnetothermoelastic problems regarding laser pulse heat with high heat flux and/or short time duration.

References

- [Ackerman and Overton 1969] C. C. Ackerman and W. C. Overton, Jr., "Second sound in solid helium-3", *Phys. Rev. Lett.* **22**:15 (1969), 764–766.
- [Ackerman et al. 1966] C. C. Ackerman, B. Bertman, H. A. Fairbank, and R. A. Guyer, "Second sound in solid helium", *Phys. Rev. Lett.* **16**:18 (1966), 789–791.
- [Baksi et al. 2005] A. Baksi, R. K. Bera, and L. Debnath, "A study of magneto-thermoelastic problems with thermal relaxation and heat sources in a three-dimensional infinite rotating elastic medium", *Int. J. Eng. Sci.* **43**:19-20 (2005), 1419–1434.
- [Biot 1956] M. A. Biot, "Thermoelasticity and irreversible thermodynamics", *J. Appl. Phys.* **27** (1956), 240–253.
- [Chadwick 1957] P. Chadwick, "Elastic wave propagation in a magnetic field", pp. 143–158 in *Proceedings of the 9th International Congress of Applied Mechanics* (Brussels, 1956), vol. 7, University of Brussels, 1957.
- [Chen et al. 2004] J. K. Chen, J. E. Beraun, and C. L. Tham, "Ultrafast thermoelasticity for short-pulse laser heating", *Int. J. Eng. Sci.* **42**:8-9 (2004), 793–807.
- [Das and Kanoria 2012] P. Das and M. Kanoria, "Magneto-thermo-elastic response in a perfectly conducting medium with three-phase-lag effect", *Acta Mech.* **223**:4 (2012), 811–828.
- [Deswal and Kalkal 2011] S. Deswal and K. Kalkal, "A two-dimensional generalized electro-magneto-thermoviscoelastic problem for a half-space with diffusion", *Int. J. Therm. Sci.* **50**:5 (2011), 749–759.
- [Dhaliwal and Sherief 1980] R. S. Dhaliwal and H. H. Sherief, "Generalized thermoelasticity for anisotropic media", *Quart. Appl. Math.* **33**:1 (1980), 1–8.
- [Ezzat and Youssef 2005] M. A. Ezzat and H. M. Youssef, "Generalized magneto-thermoelasticity in a perfectly conducting medium", *Int. J. Solids Struct.* **42**:24-25 (2005), 6319–6334.

- [Ezzat et al. 2004] M. A. Ezzat, M. Zakaria, and A. Abdel-Bary, "Generalized thermoelasticity with temperature dependent modulus of elasticity under three theories", *J. Appl. Math. Comput.* **14**:1-2 (2004), 193–212.
- [Fang et al. 2007] D. Fang, Y. Sun, and A. K. Soh, "Advances in thermoelastic damping in micro- and nano- mechanical resonators: a review", *J. Solid Mech. Mater. Eng.* **1**:1 (2007), 18–34.
- [Green and Lindsay 1972] A. E. Green and K. A. Lindsay, "Thermoelasticity", *J. Elasticity* **2**:1 (1972), 1–7.
- [Green and Naghdi 1991] A. E. Green and P. M. Naghdi, "A re-examination of the basic postulates of thermomechanics", *Proc. R. Soc. Lond. A* **432**:1885 (1991), 171–194.
- [Green and Naghdi 1992] A. E. Green and P. M. Naghdi, "On undamped heat waves in an elastic solid", *J. Therm. Stresses* **15**:2 (1992), 253–264.
- [Green and Naghdi 1993] A. E. Green and P. M. Naghdi, "Thermoelasticity without energy dissipation", *J. Elasticity* **31**:3 (1993), 189–208.
- [He et al. 2002] T. He, X. Tian, and Y. Shen, "State space approach to one-dimensional thermal shock problem for a semi-infinite piezoelectric rod", *Int. J. Eng. Sci.* **40**:10 (2002), 1081–1097.
- [Hetnarski and Ignaczak 1999] R. B. Hetnarski and J. Ignaczak, "Generalized thermoelasticity", *J. Therm. Stresses* **22**:4-5 (1999), 451–476.
- [Javan and Nasirzadeh 2012] N. S. Javan and Z. Nasirzadeh, "Self-focusing of circularly polarized laser pulse in the hot magnetized plasma in the quasi-neutral limit", *Phys. Plasmas* **19**:11 (2012), Article ID # 112304.
- [Jones 1966] J. P. Jones, "Thermoelastic vibrations of a beam", *J. Acoust. Soc. Am.* **39** (1966), 542–548.
- [Joseph and Preziosi 1989] D. D. Joseph and L. Preziosi, "Heat waves", *Rev. Mod. Phys.* **61**:1 (1989), 41–73.
- [Kaliski and Petykiewicz 1959] S. Kaliski and J. Petykiewicz, "Equation of motion coupled with the field of temperature in a magnetic field involving mechanical and electrical relaxation for anisotropic bodies", *Proc. Vib. Probl.* **4** (1959), 1–12.
- [Kidawa-Kukla 1997] J. Kidawa-Kukla, "Vibration of a beam induced by harmonic motion of a heat source", *J. Sound Vib.* **205**:2 (1997), 213–222.
- [Kidawa-Kukla 2003] J. Kidawa-Kukla, "Application of the Green functions to the problem of the thermally induced vibration of a beam", *J. Sound Vib.* **262**:4 (2003), 865–876.
- [Knopoff 1955] L. Knopoff, "The interaction between elastic wave motions and a magnetic field in electrical conductors", *J. Geophys. Res.* **60**:4 (1955), 441–456.
- [Kumar and Mukhopadhyay 2009] R. Kumar and S. Mukhopadhyay, "Effects of three phase lags on generalized thermoelasticity for an infinite medium with a cylindrical cavity", *J. Therm. Stresses* **32**:11 (2009), 1149–1165.
- [Lord and Shulman 1967] H. W. Lord and Y. A. Shulman, "A generalized dynamical theory of thermoelasticity", *J. Mech. Phys. Solids* **15**:5 (1967), 299–309.
- [Nayfeh and Nemat-Nasser 1972] A. H. Nayfeh and S. Nemat-Nasser, "Electromagneto-thermoelastic plane waves in solids with thermal relaxation", *J. Appl. Mech. (ASME)* **39**:1 (1972), 108–113.
- [Özişik and Tzou 1994] M. N. Özişik and D. Y. Tzou, "On the wave theory in heat conduction", *J. Heat Transf. (ASME)* **116**:3 (1994), 526–535.
- [Paria 1962] G. Paria, "On magneto-thermo-elastic plane waves", *Math. Proc. Cambridge Philos. Soc.* **58**:3 (1962), 527–531.
- [Sherief and Ezzat 1996] H. H. Sherief and M. A. Ezzat, "A thermal-shock problem in magneto-thermoelasticity with thermal relaxation", *Int. J. Solids Struct.* **33**:30 (1996), 4449–4459.
- [Sherief and Helmy 2002] H. H. Sherief and K. A. Helmy, "A two-dimensional problem for a half-space in magneto-thermoelasticity with thermal relaxation", *Int. J. Eng. Sci.* **40**:5 (2002), 587–604.
- [Sun et al. 2008] Y. Sun, D. Fang, M. Saka, and A. K. Soh, "Laser-induced vibrations of micro-beams under different boundary conditions", *Int. J. Solids Struct.* **45**:7-8 (2008), 1993–2013.
- [Tang and Araki 1999] D. W. Tang and N. Araki, "Wavy, wavelike, diffusive thermal responses of finite rigid slabs to high-speed heating of laser-pulses", *Int. J. Heat Mass Transf.* **42**:5 (1999), 855–860.
- [Tzou 1997] D. Y. Tzou, *Macro-to-micro scale heat transfer: the lagging behavior*, Taylor and Francis, Bristol, 1997.

- [Wang and Xu 2001] X. Wang and X. Xu, "Thermoelastic wave induced by pulsed laser heating", *Appl. Phys. A Mater. Sci. Process.* **73**:1 (2001), 107–114.
- [Wang and Xu 2002] X. Wang and X. Xu, "Thermoelastic wave in metal induced by ultrafast laser pulses", *J. Therm. Stresses* **25**:5 (2002), 457–473.
- [Youssef 2006] H. M. Youssef, "Two-dimensional generalized thermoelasticity problem for a half-space subjected to ramp-type heating", *Eur. J. Mech. A Solids* **25**:5 (2006), 745–763.
- [Youssef and Al-Felali 2012] H. M. Youssef and A. S. Al-Felali, "Generalized thermoelasticity problem of material subjected to thermal loading due to laser pulse", *Appl. Math.* **3**:2 (2012), 142–146.

Received 22 Mar 2013. Revised 29 May 2013. Accepted 1 Sep 2013.

SUNITA DESWAL: spannu_gju@yahoo.com

Department of Mathematics, Guru Jambheshwar University of Science & Technology, Hisar 125001, Haryana, India

SANDEEP SINGH SHEORAN: sandeep_gjtu@yahoo.co.in

Department of Mathematics, Guru Jambheshwar University of Science & Technology, Hisar 125001, Haryana, India

KAPIL KUMAR KALKAL: kapilkalkal_gju@rediffmail.com

Department of Mathematics, Guru Jambheshwar University of Science & Technology, Hisar 125001, Haryana, India

JOURNAL OF MECHANICS OF MATERIALS AND STRUCTURES

msp.org/jomms

Founded by Charles R. Steele and Marie-Louise Steele

EDITORIAL BOARD

ADAIR R. AGUIAR University of São Paulo at São Carlos, Brazil
KATIA BERTOLDI Harvard University, USA
DAVIDE BIGONI University of Trento, Italy
IWONA JASIUK University of Illinois at Urbana-Champaign, USA
THOMAS J. PENCE Michigan State University, USA
YASUhide SHINDO Tohoku University, Japan
DAVID STEIGMANN University of California at Berkeley

ADVISORY BOARD

J. P. CARTER University of Sydney, Australia
R. M. CHRISTENSEN Stanford University, USA
G. M. L. GLADWELL University of Waterloo, Canada
D. H. HODGES Georgia Institute of Technology, USA
J. HUTCHINSON Harvard University, USA
C. HWU National Cheng Kung University, Taiwan
B. L. KARIHALOO University of Wales, UK
Y. Y. KIM Seoul National University, Republic of Korea
Z. MROZ Academy of Science, Poland
D. PAMPLONA Universidade Católica do Rio de Janeiro, Brazil
M. B. RUBIN Technion, Haifa, Israel
A. N. SHUPIKOV Ukrainian Academy of Sciences, Ukraine
T. TARNAI University Budapest, Hungary
F. Y. M. WAN University of California, Irvine, USA
P. WRIGGERS Universität Hannover, Germany
W. YANG Tsinghua University, China
F. ZIEGLER Technische Universität Wien, Austria

PRODUCTION production@msp.org


SILVIO LEVY Scientific Editor

See msp.org/jomms for submission guidelines.

JoMMS (ISSN 1559-3959) at Mathematical Sciences Publishers, 798 Evans Hall #6840, c/o University of California, Berkeley, CA 94720-3840, is published in 10 issues a year. The subscription price for 2013 is US \$555/year for the electronic version, and \$705/year (+\$60, if shipping outside the US) for print and electronic. Subscriptions, requests for back issues, and changes of address should be sent to MSP.

JoMMS peer-review and production is managed by EditFLOW[®] from Mathematical Sciences Publishers.

PUBLISHED BY

 **mathematical sciences publishers**
nonprofit scientific publishing

<http://msp.org/>

© 2013 Mathematical Sciences Publishers

Journal of Mechanics of Materials and Structures

Volume 8, No. 8-10

October-December 2013

- Analysis of pull-in instability of electrostatically actuated carbon nanotubes using the homotopy perturbation method** MIR MASOUD SEYYED FAKHRABADI, ABBAS RASTGOO and MOHAMMAD TAGHI AHMADIAN 385
- Thermoelastic damping in an auxetic rectangular plate with thermal relaxation: forced vibrations** BOGDAN T. MARUSZEWSKI, ANDRZEJ DRZEWIECKI, ROMAN STAROSTA and LILIANA RESTUCCIA 403
- Worst-case load in plastic limit analysis of frame structures** YOSHIHIRO KANNO 415
- A two-dimensional problem in magnetoelastocity with laser pulse under different boundary conditions** SUNITA DESWAL, SANDEEP SINGH SHEORAN and KAPIL KUMAR KALKAL 441
- Rapid sliding contact in three dimensions by dissimilar elastic bodies: Effects of sliding speed and transverse isotropy** LOUIS MILTON BROCK 461
- Weight function approach to a crack propagating along a bimaterial interface under arbitrary loading in an anisotropic solid** LEWIS PRYCE, LORENZO MORINI and GENNADY MISHURIS 479
- Effects of transverse shear deformation on thermomechanical instabilities in patched structures with edge damage** PEINAN GE and WILLIAM J. BOTTEGA 501



1559-3959(2013)8:8;1-4